(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



- (100) 6 601600 (1110) (1011) (101

(43) International Publication Date 14 July 2005 (14.07.2005)

PCT

(10) International Publication Number WO 2005/064544 A1

(51) International Patent Classification⁷:

G07B 15/00

(21) International Application Number:

PCT/EP2003/014770

(22) International Filing Date:

23 December 2003 (23.12.2003)

(25) Filing Language:

English

(26) Publication Language:

English

- (71) Applicant (for all designated States except US): TELE-COM ITALIA S.P.A. [TT/IT]; Piazza degli Affari, 2, I-20123 Milano (IT).
- (72) Inventors; and-
- (75) Inventors/Applicants (for US only): ANNONI, Marco [IT/IT]; Telecom Italia S.p.A., Via G. Reiss Romoli, 274, I-10148 Torino (IT). ASCOLESE, Antonio [IT/IT]; Telecom Italia S.p.A, Via G. Reiss Romoli, 274, I-10148 Torino (IT). SALIS, Nicoletta [IT/IT]; Telecom Italia S.p.A., Via G. Reiss Romoli, 274, I-10148 Torino (IT).
- (74) Agents: GIANNESI, Pier, Giovanni et al.; Pirelli & C. S.p.A., Viale Sarca, 222, I-20126 Milano (IT).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,

SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PI, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TJ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG-KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- of inventorship (Rule 4.17(iv)) for US only

Published:

with international search report

[Continued on next page]

(54) Title: METHOD AND SYSTEM FOR IDENTIFICATION AND REGISTRATION OF A MOVING OBJECT ENTERING A PRE-DETERMINED AREA, RELATED NETWORK AND COMPUTER PROGRAM PRODUCT THEREFOR

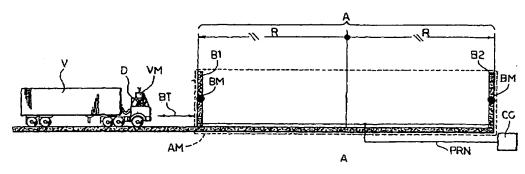

(57) Abstract: A method for identification and registration of a moving object (V, VM), entering a pre-determined area (A) to be monitored. The identification operation comprises interaction between said moving object and an area access system (AM) associated to said predetermined area (A) and including supplying identification information (VID, TCC1, D, TAT), while said registration operation is carried out over a wireless communication link (LT) to a control center (CC). The method further includes identifying said moving object (V) through a mutual interaction between said moving object (V, VM) and the area access system (AM), said mutual interaction being performed over a wireless short range communication link (BT), preferably a Bluetooth wireless link; and performing said registration operation by establishing (GP) a wireless communication link (LT) of the long-range type between said moving object (V, VM) and said control center (CC), upon activation of said mutual interaction on the wireless short range communication link (BT). Preferred application in safety monitoring of tunnels.

14 772770/2000

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.